


# XVR-G Series

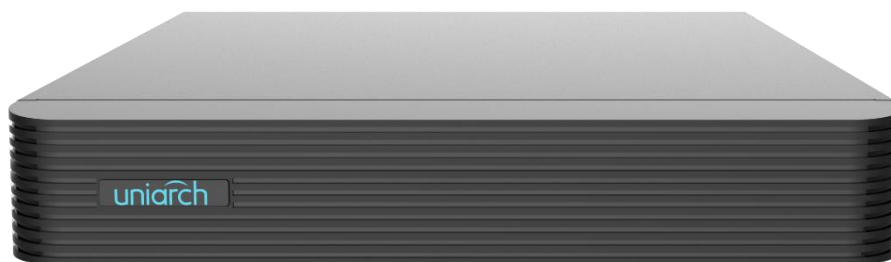

## Key Features


- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4/8-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080
- Long transmission distance over coax cable

## Specifications

Model	XVR-104G	XVR-108G
Video/Audio Input		
Analog Video Input	4-ch, BNC	8-ch, BNC
IP Video Input	2-ch(only IP up to 6ch), each channel up to 4MP	4-ch(only IP up to 8ch), each channel up to 4MP
Supported Analog Camera Types	<b>Support AHD input:</b> 5MP@20fps(The first channel) 5MP@12fps 4MP@15fps 1080P@30fps 720P@60fps <b>Support TVI input:</b> 5MP@20fps(The first channel) 5MP@12fps 4MP@15fps 1080P@30fps 720P@60fps <b>Support CVI input:</b> 5MP@20fps(The first channel) 4MP@15fps 1080P@30fps	<b>Support AHD input:</b> 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps <b>Support TVI input:</b> 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps <b>Support CVI input:</b> 4MP@15fps 1080P@30fps 720P@30fps <b>Support CVBS input</b>


	720P@30fps <b>Support CVBS input</b>	
Audio Input	1-ch, RCA	1-ch, RCA
Two-way Audio	1-ch, RCA	1-ch, RCA
<b>Network</b>		
Incoming Bandwidth	48Mbps	
Outgoing Bandwidth	60Mbps	
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE	
<b>Video/Audio Output</b>		
VGA Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
HDMI Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Audio Output	1-ch, RCA	
Synchronous Playback	4-ch	8-ch
<b>Encoding</b>		
Recording Resolution	5MP Lite/4MP Lite/1080P/720P/CIF	5MP Lite/4MP Lite /1080P/720P/CIF
Recording Frame Rate	<b>Main stream:</b> 5MP Lite@12fps 4MP Lite@15fps 2MP@15fps 720P@30fps <b>Sub stream:</b> D1@30fps(Max)	<b>Main stream:</b> 5MP Lite@6fps 4MP Lite@8fps 2MP Lite@15fps 2MP@8fps 720P@15fps <b>Sub stream:</b> D1@15fps(Max)
<b>Hard Disk</b>		
SATA	1 SATA interface	
Capacity	Up to 6TB for each HDD	
<b>External Interface</b>		
Network Interface	1RJ45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel:2 x USB2.0	
<b>General</b>		
Power Supply	12V DC Power Consumption: ≤ 8 W( without HDD )	
Working Environment	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)	
Dimensions(W×D×H)	255mm ×215mm× 42mm (10.0" × 8.5"×1.7")	
Weight ( without HDD )	≤1.1 Kg ( 2.42lb )	

## Dimensions

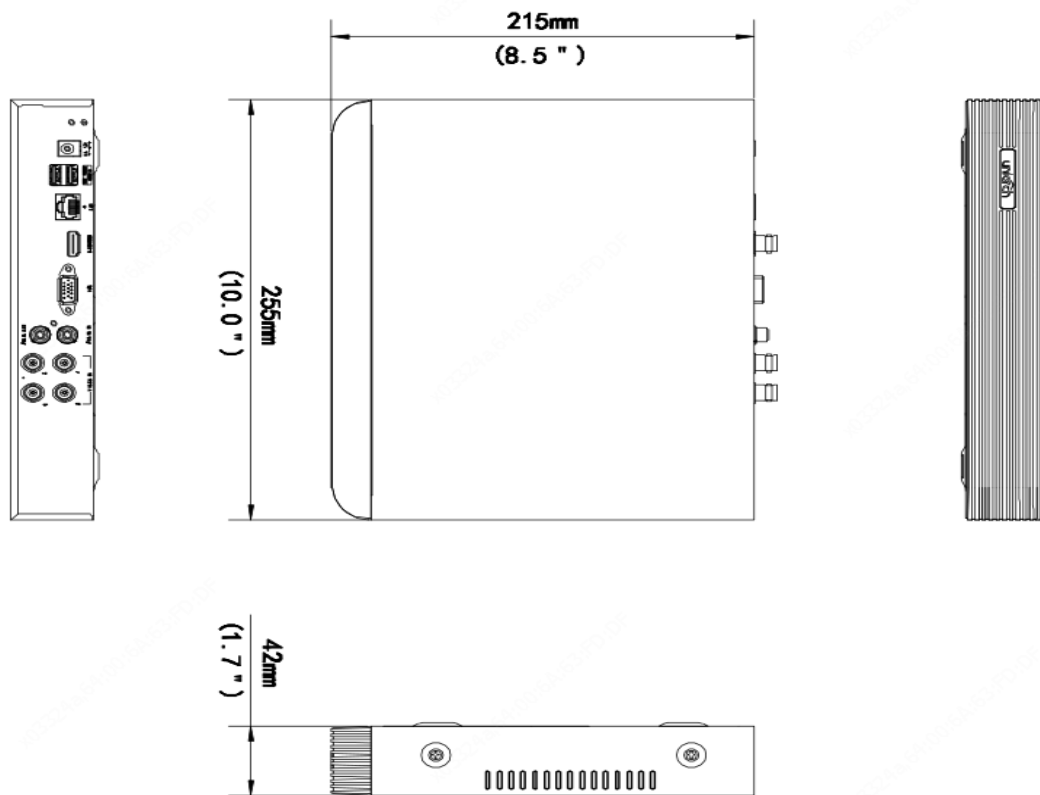

## Rear Panel

Take XVR-104-G for example

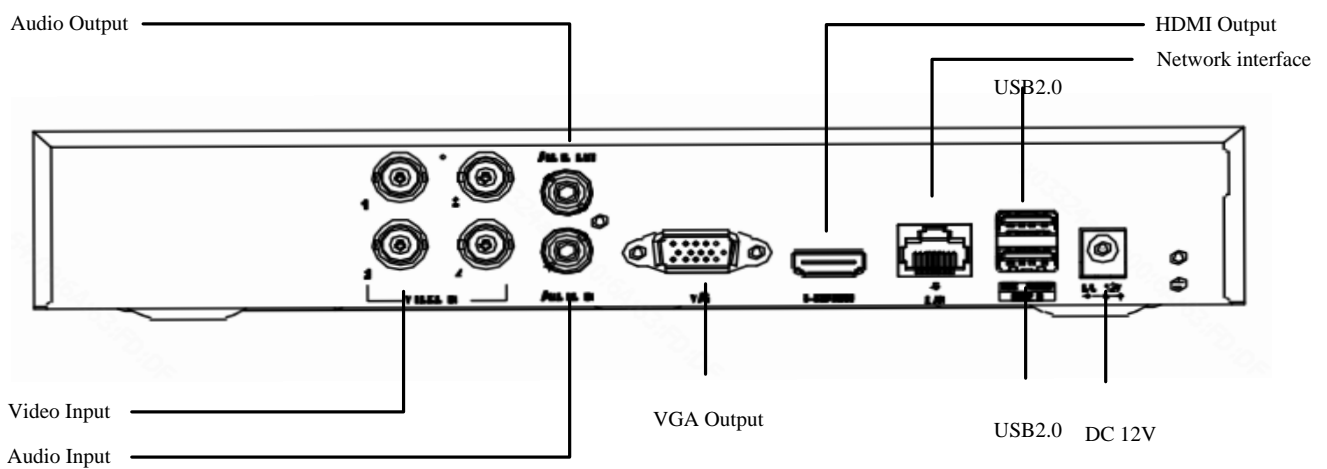

[www.uniview.com/uniarch](http://www.uniview.com/uniarch)

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.