

- Durable Mechanism* ●
- Fast Passage* ●
- Elegant Design* ●
- Aesthetic Solution* ●
- User-friendly* ●
- Longlived* ●

T 300 HG 60

HG GATE

T 300 HG 60

HG GATE

T 300 HG 60 provides an aesthetic solution to the access control needs with its economical dimensions and stylish design. Thus, space safety can be complemented by a modern look.

Application

T 300 HG 60 can be used easily in hotels, universities, business centers, ministries, banks, airports and any similar areas especially in buildings that value interior design.

Basic Materials

T 300 HG 60 is produced in AISI 304 stainless steel body, with reinforced 10 mm glass wings and black plexyglass top cover.


Logo can be applied on glass wings. If desired, glass wings can be produced from pvc material. All mechanical parts are specially coated to protect against corrosion. The electronic boards are designed by the qualified engineers of Makim, enabling T 300 HG 60 operate in various modes and entegrations.

General Use

All kind of access control systems like card reader, biometric reader, remote control unit or push button can be entegrated to T 300 HG 60. For this purpose, optional reader foot can be produced by Makim. Once the access right is granted, the gate will open automatically and once the passage is completed, the gate closes itself. If the user does not use the passage right in 15 seconds, the gate will give buzzer warning and it will be closed again. Unauthorized passages are prevented via special sensors. The passage interval is 50-55 cm. There are LED lights on both sides of the T 300 HG 60 with green and red color indicating the access direction.

Safety

Optional production can be done to provide manual or automatic opening of the wings in case of power cut. As an alternative, battery can be used , in order to keep T 300 HG 60 working in its standard mode for a certain period while power is gone.

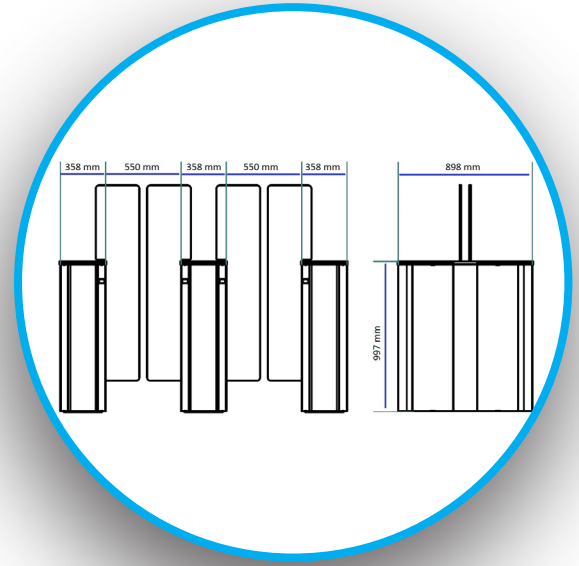

Case Dimensions (WxLxH)	358 x 898 x 997 mm
Clear Walkway	500-550 mm
Drive	Motorized
Body	304 Grade SS
Top Cover	Black Plexyglass
Wings	10 mm Glass
Installations	Simple & Easy Installation
Power Supply	115/230W AC50/60Hz
Operation Voltage	24VDC +/-%20
Weight	65 Kg
Opening/Closing Period	0,30 - 0,50
IP Protection	IP 42
Passage per Minute	20-30

FACTORY

Address: Sincan Organize Sanayi Bölgesi,
Erkunt Cd. No: 20 06930 Sincan / Ankara
Phone: +90 (312) 267 56 87 Fax: 0 (312) 267 56 99
satis@makim.com.tr

ANKARA SALES OFFICE

Address: Batı Sitesi Mah. Gersan, 2307 Sk/3.Cad.
No:16 06970 Ergazi / Ankara
Phone: +90 (312) 257 02 52 Fax: 0 (312) 257 02 55
pazarlama@makim.com.tr

BRANCH

Address: Perpa Ticaret Merkezi, B Blok
Kat: 7-8 No: 987-989 Şişli İstanbul
Phone: +90 (212) 210 29 41 Fax 0 (212) 210 68 15
sube@makim.com.tr

WAREHOUSE AND TECHNICAL DELIVERY

Address: Perpa Ticaret Merkezi, B Blok
Kat: 1-2 No:57 Şişli İstanbul
Phone: +90 (212) 210 29 41 Fax: 0 (212) 210 68 15
sube@makim.com.tr