

- Durable Mechanism
- Fast Passage
- Elegant Design
- Aesthetic Solution
- User-friendly
- Longlived
- Economic Design

T 300 HG SLIM SHORT

HG GATE

T 300 HG SLIM SHORT HG GATE

T 300 HG Slim Short provides an aesthetic solution to the access control needs with its economical dimensions and stylish design. Thus, space safety can be complemented by a modern look.

Application

T 300 HG Slim Short can be used easily in hotels, universities, business centers, ministries, banks, airports and any similar areas especially in buildings that value interior design.

Basic Materials


The T 300 HG Slim Short main body is made of 304 stainless steel, the wings and the top cover are made of extra reinforced black plexyglass. Logo can be applied on plexyglass wings. Optionally, plexyglass wings can be produced from glass material. All mechanical parts are specially coated to protect against corrosion. The electronic boards are designed by the qualified engineers of Makim, enabling T 300 HG Slim Short operate in various modes and entegrations.

General Use

All kind of access control systems like card reader, biometric reader, remote control unit or push button can be entegrated to T 300 HG Slim Short. For this purpose, optional reader foot can be produced by Makim. Once the access right is granted, the gate will open automatically and once the passage is completed, the gate closes itself. If the user does not use the passage right in 15 seconds, the gate will give buzzer warning and it will be closed again. Unauthorized passages are prevented via special sensors. The passage interval is 60 cm. There are LED lights on both sides of the T 300 HG Slim Short with green and red color indicating the access direction.

Safety

Optional production can be done to provide manual or automatic opening of the wings in case of power cut. As an alternative, battery can be used , in order to keep T 300 HG Slim Short working in its standard mode for a certain period while power is gone.

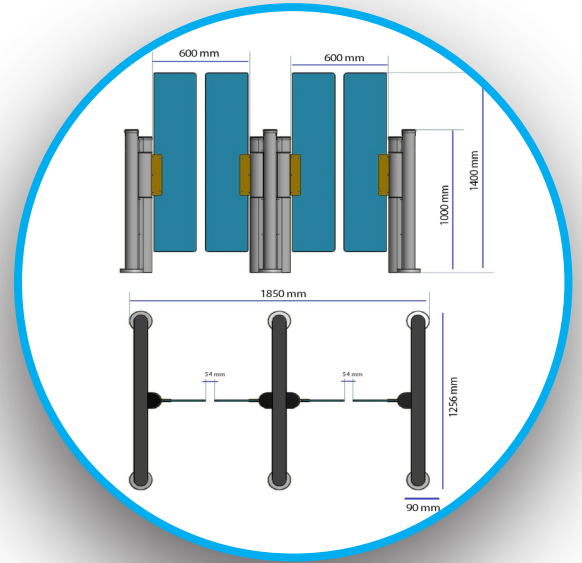

| | |
|-------------------------|----------------------------|
| Case Dimensions (WxLxH) | 90x1256x1000 mm |
| Clear Walkway | 600 mm |
| Drive | Motorized |
| Body | 304 Grade SS |
| Top Cover | 10 mm Plexyglass |
| Wings | 10 mm Plexyglass |
| Installations | Simple & Easy Installation |
| Power Supply | 115/230W AC50/60Hz |
| Operation Voltage | 24VDC +-%20 |
| Weight | 36 Kg |
| Opening/Closing Period | 0,30 - 0,50 |
| IP Protection | IP42 |
| Passage per Minute | 20-30 |

FACTORY

Address: Sincan Organize Sanayi Bölgesi,
Erkunt Cd. No: 20 06930 Sincan / Ankara
Phone: +90 (312) 267 56 87 Fax: 0 (312) 267 56 99
satis@makim.com.tr

ANKARA SALES OFFICE

Address: Batı Sitesi Mah. Gersan, 2307 Sk/3.Cad.
No:16 06970 Ergazi / Ankara
Phone: +90 (312) 257 02 52 Fax: 0 (312) 257 02 55
pazarlama@makim.com.tr

BRANCH

Address: Perpa Ticaret Merkezi, B Blok
Kat: 7-8 No: 987-989 Şişli İstanbul
Phone: +90 (212) 210 29 41 Fax 0 (212) 210 68 15
sube@makim.com.tr

WAREHOUSE AND TECHNICAL DELIVERY

Address: Perpa Ticaret Merkezi, B Blok
Kat: 1-2 No:57 Şişli İstanbul
Phone: +90 (212) 210 29 41 Fax: 0 (212) 210 68 15
sube@makim.com.tr